


RF CONNECTOR IN / OUT POWER AMPLIFIER

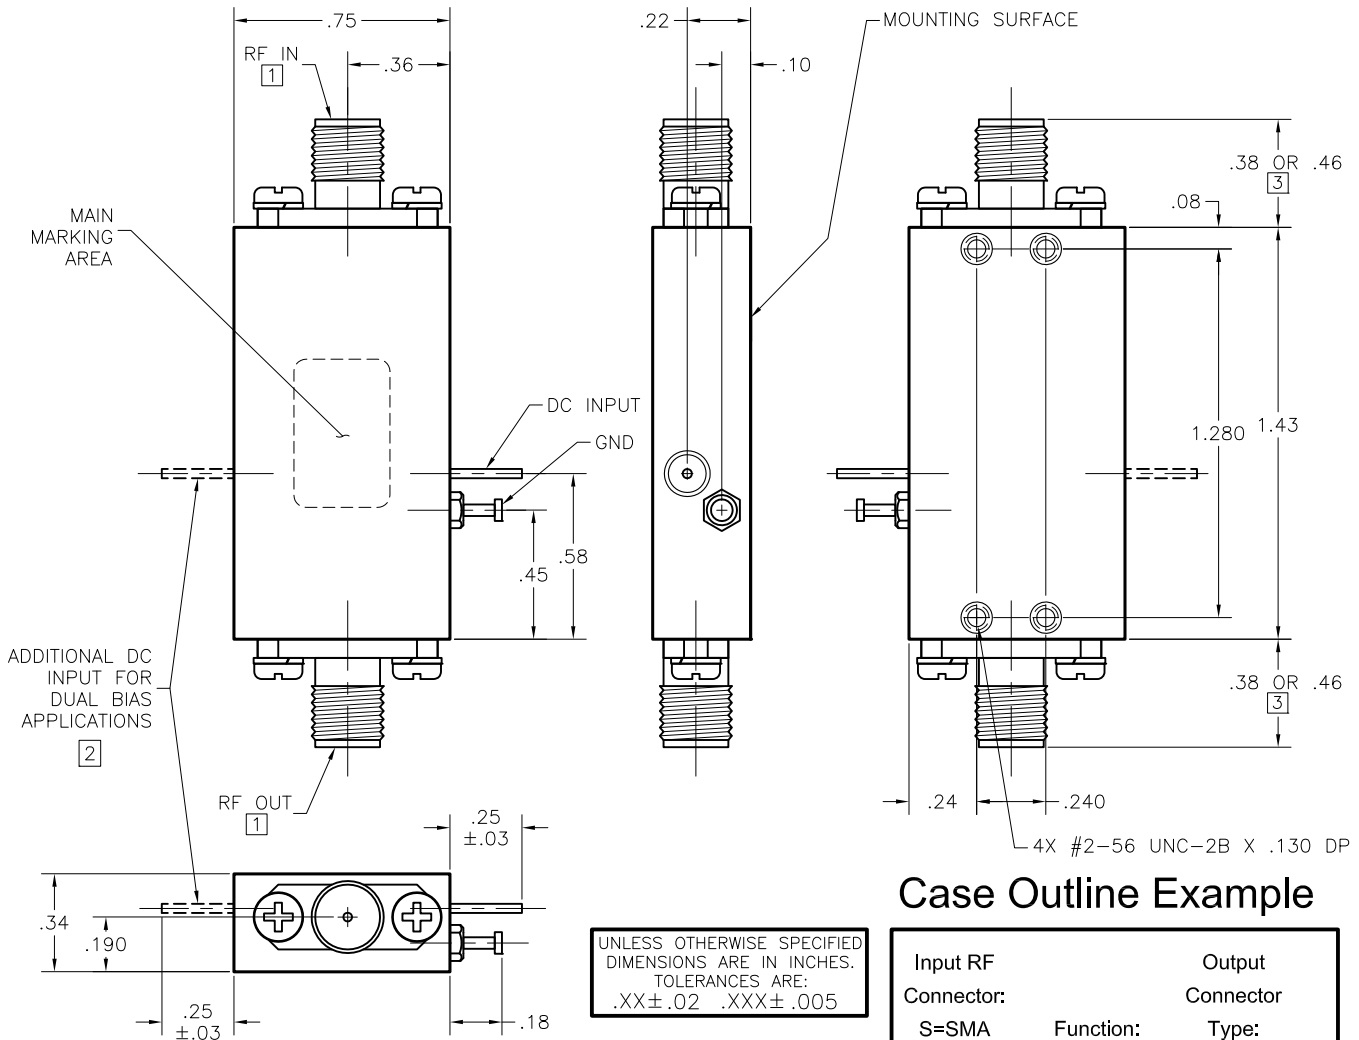

NOTES: (Unless Otherwise Specified)

- [1] RF CONNECTORS ARE SMA, 2.92mm OR 1.85mm FEMALE.
- [2] ONLY USED ON PACKAGE NUMBERS ENDING IN "D".
- [3] CONNECTOR DIMENSIONS:
SMA & 2.92mm FEMALE ARE .38". 1.85mm FEMALE IS .46".

Power Amplifier Outline Drawing for Cases with Female Connectors. Male Connectors available upon request. Waveguide options are available for Products operating >18 GHz

Case Outline Example

Input RF Connector:	Function:	Output Connector:
S=SMA	P=Power	Type:
K=2.92mm	Amplifier	M=Male
V=1.85mm		F=Female

SF06PSFS

Input Connector:	Output RF Connector:	Bias Pin Configuration:
Type:	S=SMA	S=Single Bias
M=Male	K=2.92mm	D=Dual Bias
F=Female	V=1.85mm	